







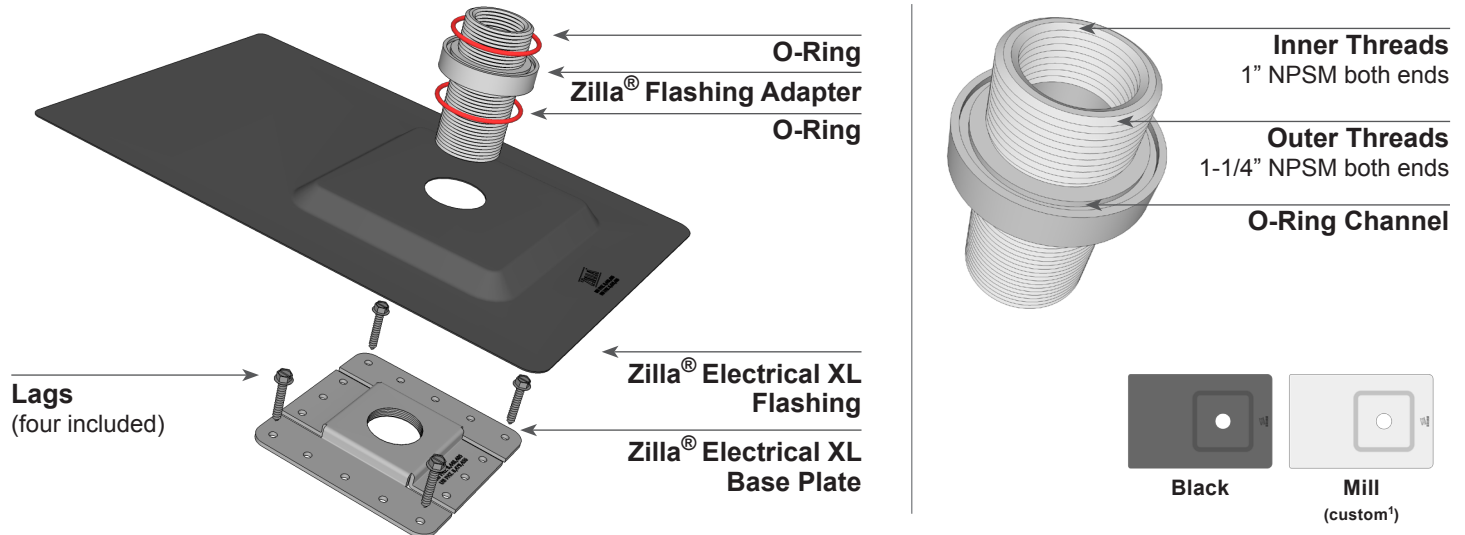

Zilla® Electrical XL Flashing

Technical Specifications

One or more patents apply to this product including without limitation:
 US Pat. 8,479,455; 8,448,405; 8,707,654; 8,689,517; 8,707,655; and/or 8,752,338.
 ZEFLSH-AAL XL / ZEFLSH-AAL BLK XL



Zilla® Electrical XL Flashing Assembly is available in Black (ZEFLSH-AAL BLK XL) or custom colors¹ and includes: Electrical XL Base Plate, 4 lags, Electrical XL Flashing, Adapter and 2 O-Rings.

PRODUCT	DESCRIPTION	MATERIALS	SIZE	COLOR
 Zilla® Flashing Adapter	Threaded Adapter to allow for a 1-1/4" Conduit Body or a Junction Box to be attached to the Electrical XL Flashing and sealed when paired with Zilla® O-Rings.	Aluminum	Ø 2.37" x 3-1/2" L; Outside, 1-1/4" NPSM both ends; Inside, 1" NPSM both ends	Mill AL
 Zilla® Electrical XL Flashing <i>(not used for metal roofs)</i>	Sits on top of the Base Plate, and is attached with the Flashing Adapter. 26 ga.	Aluminum	15" L x 9-7/8" W x 1/2" H	Black
		Aluminum		Mill ¹
 Zilla® Electrical XL Base Plate	Base Plate is attached to the roof with lags. Flashing is attached to the Base Plate using the Flashing Adapter.	Aluminum	6" L x 6" W x 1/2" H	Mill
 Zilla® O-Rings <i>(two included)</i>	Creates a seal against the Adapter. Two (2) included.	High Temperature Polymer	2-3/16" O.D., 2" I.D., Ø 3/32"	Red / Black
 Lags <i>(four included)</i>	1/4" x 1-1/2" lags. Four (4) included.	Zinc	3/8" hex x 1-3/4" long	Zinc

¹ Flashing available in Mill and custom colors, call for details and availability, minimum orders may apply.

Zilla® So Simple It's ScarySM

77 Waneka Pkwy • Lafayette, CO 80026 • 720.880.6700 • fax 303.664.1268 • zillarac.com

 MADE IN USA  MADE WITH RECYCLED MATERIAL © 2016 Zilla Corporation. All rights reserved.