

NEX Multiple Mailbox Support System









Qty 2" 14ga NEX® Multiple Mailbox Post & Hardware Kit 2-1/4" 12ga SQ Anchor 30" NEX® Wedge™ 5 **U-Brackets** 5 Universal Mailbox Brackets 10 5/16" Hardware sets 20 #10 Hardware sets

To assemble the multiple mailbox, follow these steps:

- 1. Install the Anchor flush with the ground, or no more than two (2") inches above the ground (see Anchor Installation Instructions).
- 2. Assemble the Universal Mailbox Bracket. flange side up, on the NEX® Multiple Mailbox Frame using the U-Bracket and 5/16" hardware with the nuts on the top side. Wider mailboxes may require different spacing. Measure the mailbox and choose the appropriate holes on the bracket to match.
- 3. Secure each mailbox to the bracket using four #10 hardware sets with the screw heads on the outside and nuts underneath.
- 4. Repeat steps #2 and #3 for each mailbox up to five (5) as desired. Space the mailboxes equidistant from each other and the edges of the frame.
- 5. Insert NEX® Post into the anchor. Place the Wedge between the post and anchor on the side of the post parallel and away from traffic. Use a hammer to secure it until it is well seated.






Mailbox bracket with U-Bracket

Frame, Wedge & Anchor

NEX® is protected by Canadian Patent #'s 2,369,517; 2,310,486 of S-Square Tube Products, Inc.



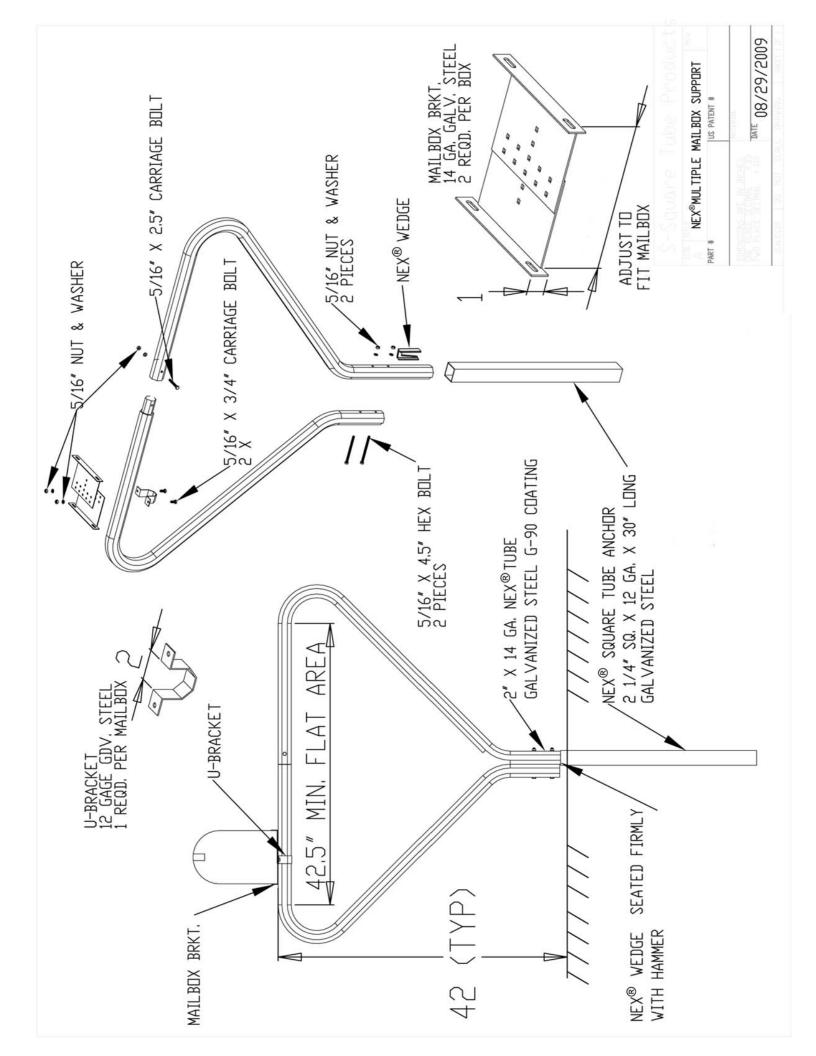

Anchor Installation



To begin the installation process, place the Drive Cap* in the opening of the anchor.



Using a power driver or sledge hammer, drive the anchor into the ground.



When the anchor is flush with the ground, or no more than two (2") inches above the ground, remove the Drive Cap*.



Place the NEX® Tube into the anchor approximately six (6") inches.



Insert the NEX® Wedge™ between the anchor and the NEX® mailbox support. Use a hammer to secure it until it is well seated.



You have successfully and easily installed the next generation of sign post - NEX®.

NEX® Wedge[™] Removal



The NEX[®] Wedge[™] can easily be removed by using a Slide Hammer*. Simply place the hook of the Slide Hammer* in the slot of the Wedge and hammer upwards.



Once the Wedge is loosened, remove the Wedge and lift the NEX® Post out of the Anchor. Your NEX® Sign Post is removed with little effort and time. Without the Slide Hammer* it is virtually impossible to remove - making it tamper resistant.



*suggested, but not required. Sold separately



Manufacturer of NEX® Sign & Mailbox Support Products *NEX® is protected by Canadian Patent #'s 2,369,517; 2,310,486 of S-Square Tube Products, Inc.

2275 W. Midway Blvd., Unit C Broomfield CO · 80020 Tel. 303.286.7051 · www.s-squaretube.com

