
Zilla® Double Stud XL Flashing



Technical Specifications

One or more patents apply to this product including without limitation: US Pat. 8,448,405; 8,707,654; 8,689,517; 8,707,655; and/or 8,752,338. ZDSFA-AL XL / ZDSFA-AL BLK XL

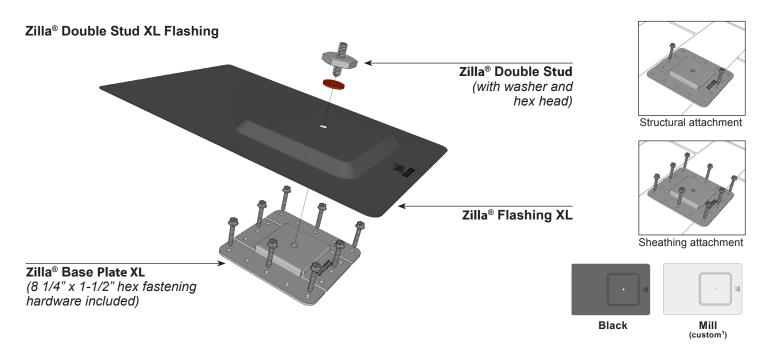

Zilla® Double Stud Flashing XL is available in Black (ZDSFA-AL BLK XL) or custom colors¹ and includes: Double Stud with Encapsulated Gland Washer, Flashing XL and Base Plate XL. Zilla® Double Stud is a 3/8"-16 x 1-1/2" stainless steel stud with 3/16" recessed hex and 1-3/8" hex aluminum nut.



PRODUCT		DESCRIPTION	MATERIALS	SIZE	COLOR
	Double Stud	Provides mechanical connection between Flashing and Quad Combo XL. 3/8"-16 SS hardware and encapsulated gland washer included.	Aluminum / SS	1-3/8" Hex x 1.5"	Mill
	Flashing XL	Sits on top of the Base Plate XL, and is captured by the Double Stud. 26 ga.	Aluminum	15" L x 9-7/8" W x 1/2" H	Black Mill ¹
	Base Plate XL	Base Plate is attached to the roof with lags. Flashing is attached to the Base Plate using the Mini Standoff.	Galvanized Steel	6" L x 6" W x 1/2" H	Mill
	Lags (eight included)	1/4" x 1-1/2" lags. Eight (8) included.	Zinc	3/8" hex drive	Zinc

¹Flashing available in Mill and custom colors, call for details and availability, minimum orders may apply.